


HEADER TO FINISHED FLOOR IS 96"(RO)

Exterior surface of framing

Vertical Section
Outswing

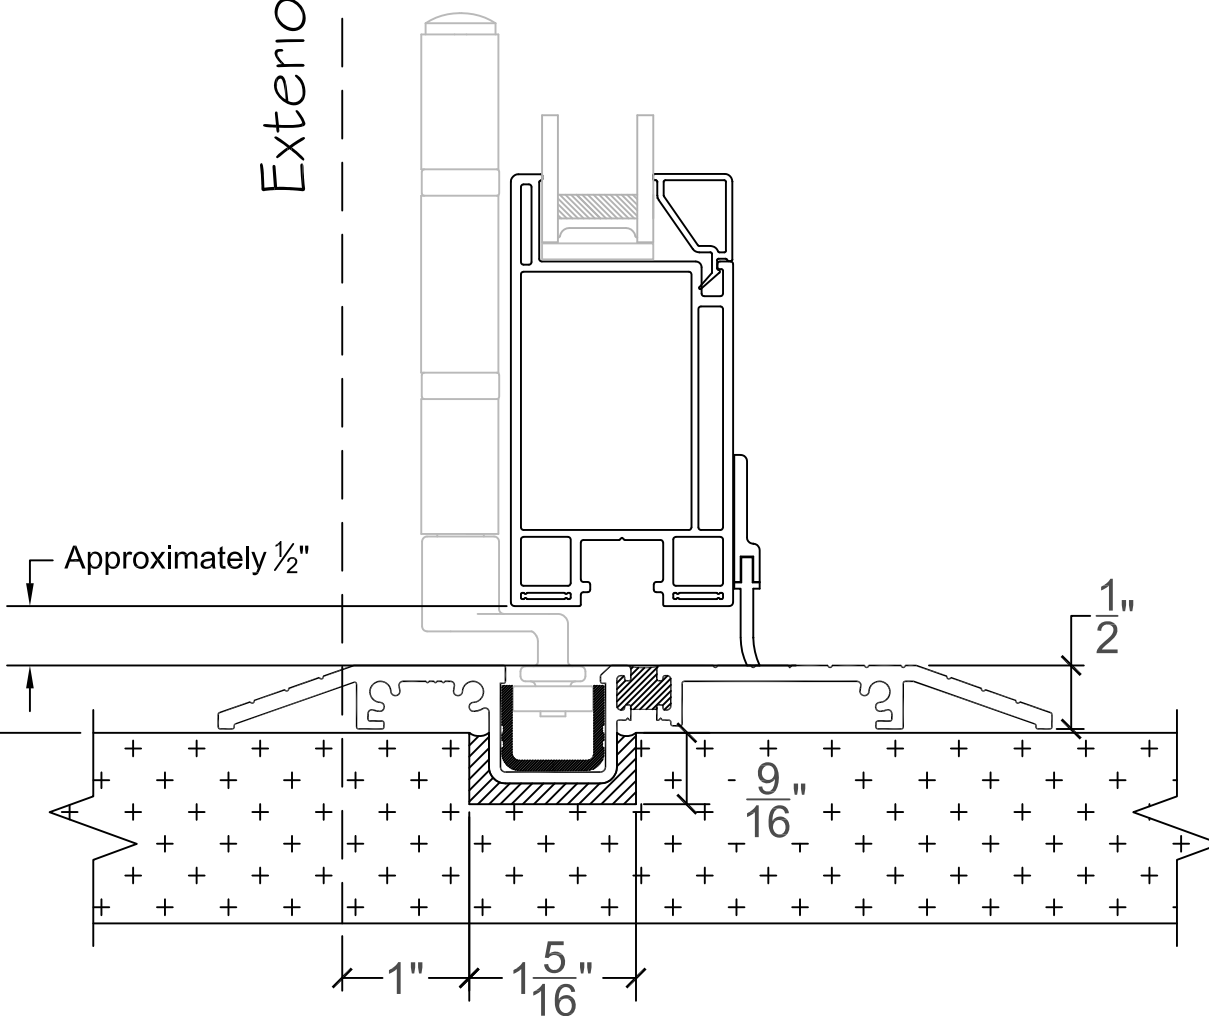

A $1\frac{5}{16}$ " x $\frac{9}{16}$ " notch needs to be created in the floor. This allows the ADA sill to sit on the finished surface. This drawing does not take into account: pans, membranes & sealant provided by others. The ADA sill are not able to withstand air & water intrusion like the weather resistant sill. This option has no weep or drainage incorporated into the track, therefore overhang and protection is important when using this sill. It is important that you include a mop zone adjacent to these doors when choosing this option. Sweep (included) is field applied.

Please note: This drawing is not project specific. Please consult your architect for a job specific detail.

File name: 2300 BiFold - Outswing ADA Sill Detail
Layout: 23BF - ADA Sill Detail with dimensions

Date: 20160922
Drawn by: D May

450 Delta Ave
Brea, Ca 92821
(714) 385-1202

WINDOR
www.windorsystems.com

Notice: This document contains information proprietary to and is protected by copyright of Win-Dor Inc. and shall not be copied, disclosed to others, or used for any purpose other than that for which it is given, without the written permission of Win-Dor Inc.